

# SecuTAC 535

World first  
IP based RFID Access Controller + Reader

## Features:

**IP based:** Standalone or network deployment alternative

**Universal Interfaced:** Wiegand input&output enables Master/Slaver access control

**Built-in relay:** contacts lock, alarm, door sensor & button etc

**Embedded webserver:** support browser to inquire access data at local or remote

## Specification:

- .Card Holders: 30,000 cards
- .Transaction Capacity: 50,000 events
- .Read Range:10-15cm
- .Reading Time (Card): <30mS
- .Platform:ZEM500 (Embedded Linux O/S)
- .Communication: RS232/484,TCP/IP
- .Built-in Relay for Door Sensor, alarm, EM-Strike/Magnetic lock, exit button
- .26 bit Wiegand Input/Output
- .LED Indicator: 3 Color LED Indicators(Blue ,Red and Green) with audible beep
  - Blue: Normal standby mode
  - Red: Access denied
  - Green: Access granted
- .Power/Current: DC12V/Max.3A
- .Dimension (W x H x T): 153x95.5x35.5mm
- .Operating Temperature: 0°C-45°C
- .Operating Humidity:20%-80%
- .Optional functions: Mifare/HID/ iClass card, Web server, Anti-pass back

For more information contact:

### Cardz Middle East


PO Box: 95781 Dubai, United Arab Emirates

Tel: 97142293780 Fax: 97142293790

Email: sales@cardzme.com, Web: www.cardzme.com



**secuTAC**

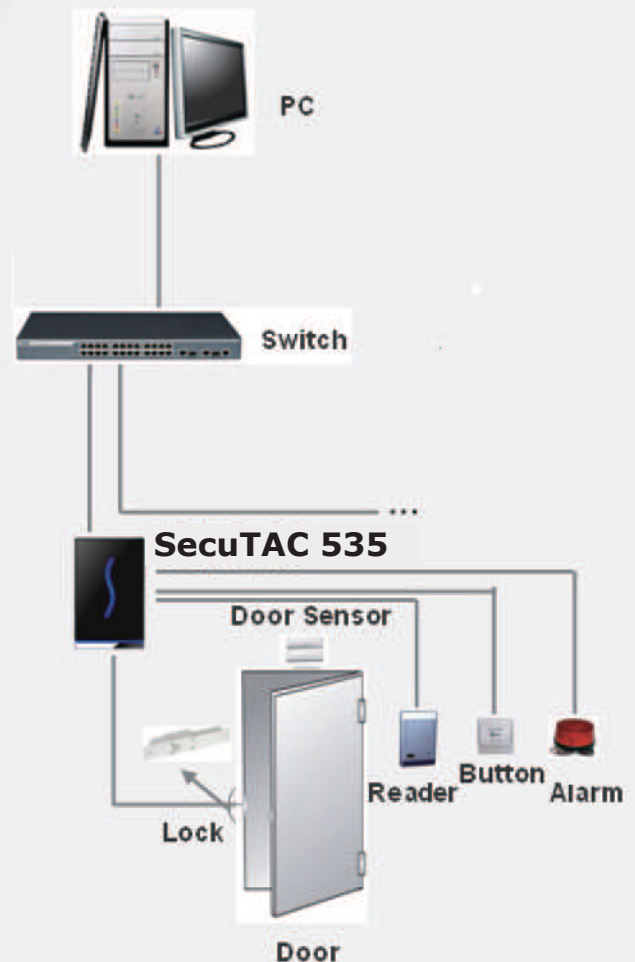

CE FC

