


# SuperLabel.

## A Revolutionary Innovation in RF Label Technology

### Features:

- Length of 1.22 inches (31mm) and width of 1.26 inches (32mm) equates to a 38% smaller surface area than the competitor's 1.5 inch square label (410).
- 19% higher relative power "Q": The SuperLabel's average Q is  $80\mu$ , compared to an average of  $65\mu$  for the competitor's 410, and  $75\mu$  for All-Tag's equivalent 1.50 (38mm) x 1.65 inch (42 mm) label.

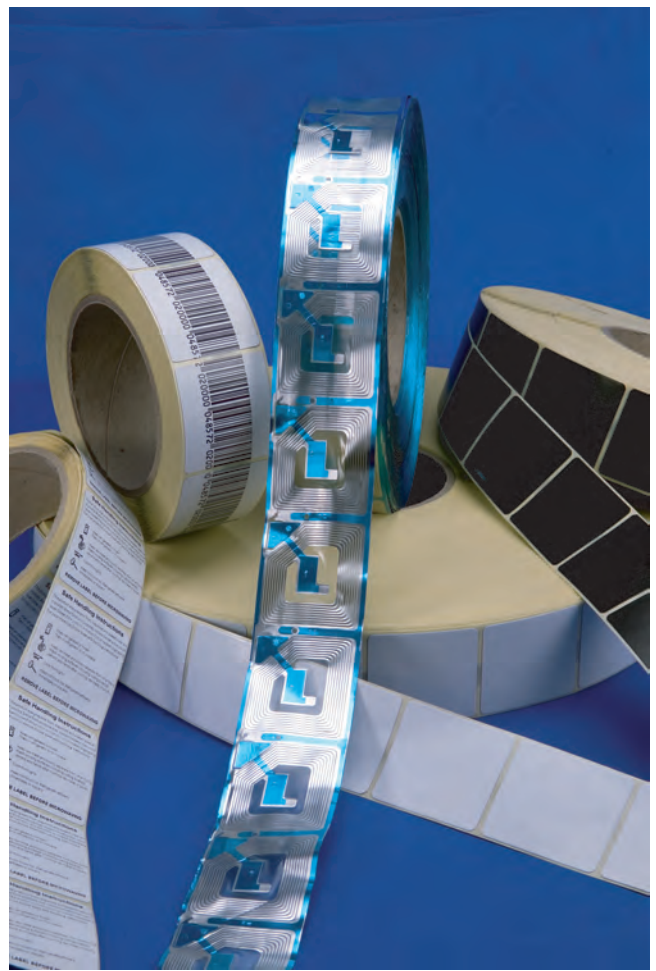

Copywrite 2007 - Patent Pending

### Functions:

- The higher Q provides comparable detection to 40 x 40mm labels
- The higher Q enables the label to interact with deactivator sooner increasing the height from the counter at which the label is deactivated


### Benefits:

- Smaller dimensions allow for tagging on smaller packaged items or hangtags
- The size and cost of combination fabric/EAS identification labels can be reduced
- These technological advances will result in the future introduction of labels with much higher detection and deactivation performance relative to label size

**"Q"** – Relative power of the label - "Q" is a general term that is applied to the relative effectiveness of a circuit or circuit element. Generally, the higher the Q factor, the better or more efficient the circuit. It is a ratio of reactance to resistance (for a series circuit), and a ratio of resistance to reactance (for a parallel circuit). When compared to the same type of circuit, such as an RF EAS label, Q is a statement of relative performance. In the EAS business, a label with a higher Q value provides better detection and deactivation performance.

Label Detection – Label detection statistics are imprecise because there are a number of uncontrollable variables. Statements concerning a label's "pick rate" should be used as a guideline only. Significant variables include the measured power of the label (Q); measured frequency of the label; tuning characteristics of the detection system; and the physical orientation of the label in relationship to the transmit signal. In general, the best performing labels are those with the highest Q value and the measured frequency closest to the center frequency of the band swept by the transmitter – all other factors equal.

# ALL-TAG



## All-Tag Security Americas Inc.


512 NW 77<sup>th</sup> Street  
Boca Raton, FL 33487

Phone: 561-998-0833  
Fax: 561-998-4897  
Toll Free: 866-998-2299  
E-mail: [info@all-tag.com](mailto:info@all-tag.com)  
Website: [www.all-tag.com](http://www.all-tag.com)

### **31X32 SuperLabel® SPECIFICATION SHEET**

LABEL REFERENCE	31X32 SuperLabel
COVER OF LABEL	Plain White / Barcode / Thermal / Clear
LABEL LENGTH	31.9 mm / 1.2559 inches with a margin of 0.5 mm
LABEL WIDTH	31.4 mm / 1.2362 inches
LABEL + SUPPORT PAPER WIDTH	33.4 mm / 1.315 inches
LABEL THICKNESS	0.2 mm / 0.009 inches
SPACE BETWEEN 2 LABELS	2 mm / 0.078 inches with a margin of 0,05 mm
LABELS PER ROLL	500 / 1000 / 2000 / 5000 / 8000
EXTERNAL DIAMETER OF ROLL OF 1000	150 mm / 5.9055 inches
MAXIMUM EXTERNAL DIAMETER OF ROLL OF 1000	155 mm / 6.102 inches
EXTERNAL DIAMETER OF ROLL OF 2000	185 mm / 7.283 inches
MAXIMUM EXTERNAL DIAMETER OF ROLL OF 2000	190 mm / 7.48 inches
INTERNAL DIAMETER OF CORE	77 mm / 3.0315 inches
ADHESIVE	Permanent Base Caoutchouc Solvant
IDENTIFICATION OF BAD LABELS	Black Line
NUMBER OF BAD LABELS PER ROLL	Indicated on the roll's core
LABEL FREQUENCY	8.2 MHz ± 5 %
DEACTIVATION	Yes
LABEL WINDING	External Winding
LABEL STORAGE	In an area with approximately 50 % humidity / Light and UV sheltered

# ALL-TAG



## All-Tag Security Americas Inc.

512 NW 77<sup>th</sup> Street  
Boca Raton, FL 33487

Phone: 561-998-0833  
Fax: 561-998-4897  
Toll Free: 866-998-2299  
E-mail: [info@all-tag.com](mailto:info@all-tag.com)  
Website: [www.all-tag.com](http://www.all-tag.com)

### **33X38 SuperLabel : SPECIFICATIONS SHEET**

LABEL REFERENCE	33X38 SuperLabel
COVER OF LABEL	Plain White / Barcode / Thermal / Clear
LABEL LENGTH	33.7 mm / 1.31 inches with a margin of 0,5 mm
LABEL WIDTH	38,1 mm / 1.5 inches
LABEL + SUPPORT PAPER WIDTH	40 mm / 1.575 inches
LABEL THICKNESS	0,22 mm / 0.009 inches
SPACE BETWEEN 2 LABELS	2 mm / 0,078 inches with a margin of 0,05 mm
LABELS PER ROLL	500 / 1000 / 2000 / 5000 / 8000
EXTERNAL DIAMETER OF ROLL OF 2000 GOOD TAGS	190 mm / 7.48 inches
MAXIMUM EXTERNAL DIAMETER OF ROLL OF 1000	195 mm / 7.677 inches
INTERNAL DIAMETER OF CORE	77 mm / 3.0315 inches
ADHESIVE	Permanent Base Caoutchouc Solvant
IDENTIFICATION OF BAD TAGS	Black Line
NUMBER OF BAD TAGS PER ROLL	Indicated on the roll's core
LABEL FREQUENCY	8.2 MHz $\pm$ 5 %
DEACTIVATION	Yes
LABELS WINDING	External Winding
LABELS STORAGE	In an area with approximately 50 % humidity / Light and UV sheltered